


## Pneumatic strapping tool for polypropylene and polyester strap with vibration sealing



New cooling welding time indicator

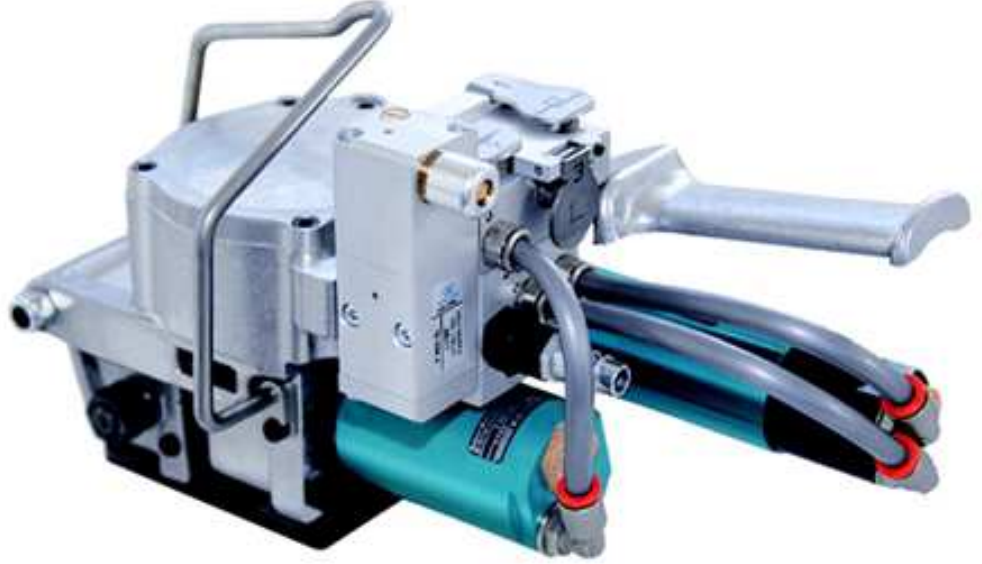

### TECHNICAL SPECIFICATIONS

#### DIMENSIONS

Length	250 mm • 9.8"
Width	140 mm • 5.5"
Height	165 mm • 6.5"
Weight	5.8 Kgs 7.9 lbs

#### FEEDING

Pressure range	6 - 7 bar / 87-99 psi
Air consumption	14 L/s - 29 cuft/min

#### PERFORMANCE

Max. tension force	5000N (T149953) 6000N (T142533)
Tensioning speed	6 mt/min 5000N 4 mt/min 6000N
Sealing	Vibration sealing
Joint strength	80% of breaking strength*
Gear ratio	-

\* variable according to strap type

### MODEL

CODE	TYPE	STRAP	THICKNESS
T142533	ITA14 - 25 mm 1"	PET 25mm - 1"	0.8mm 0.028" - 1.27mm 0.05"
T149953	ITA14 -25/32mm 1" - 1½"	PET 25/32mm 1" - 1½"	0.8 mm 0.04" - 1.27 mm 0.050"

#### POLYESTER STRAP



#### POLYESTER STRAP



**Pakmak Ambalaj Paketleme Makineleri**  
 10016 Sk. No.6 AOSB Çiğli / İzmir  
 0 232 328 10 51  
 info@pakmak.com

